



PRODUCT DATA SHEET

REX VISION 4

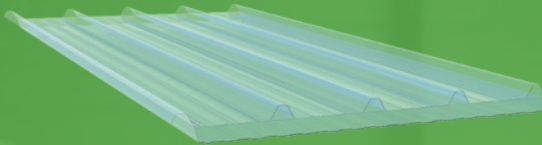


APPLICATIONS

The REX VISION 4 insulated rooflight fits perfectly with the sandwich panels from the ROOF 4 range. Due to the multiple layer structure in the core, a relatively high insulation value is created.

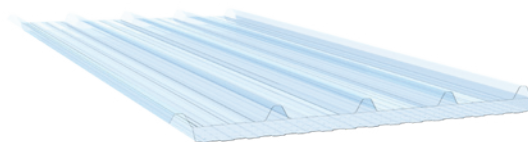

SECTION

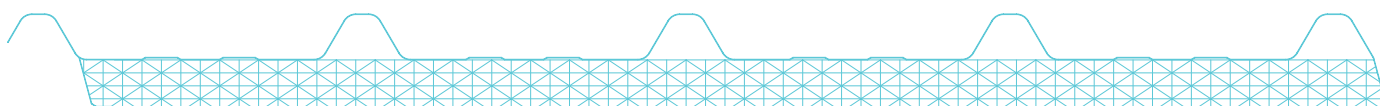

PROPERTIES

Thickness [D]	Total thickness	Weight	U-value	Rd-value	Light Transmittance
[mm]	[Dt]	[kg/m ²]	[W/m ² .K]	[m ² .k/W]	[%]
20	53	2,4	1,56	0,64	65
30	63	2,5	1,28	0,78	55
40	73	2,7	1,00	1,00	40

Fire

Property	Standard	Certification Standard	Result	Field of application
Reaction to Fire	EN ISO 11925-2:2010 ignitability	EN 13501-1:2007 Fire classification of construction products and building elements - Part 1	B-S2-D0	All thicknesses
	EN 13501-1:2017 reaction to fire			



Other properties

Color	White transparant
Sound Reduction	30 dB
Expansion coefficient	0,065 mm/m°C
Hail Resistance	u > 21 m/s @20 mm diameter
Soft body impact	1200 J

Environmental

For further information on environmental issues please contact the sales department of REX Panels & Profiles.

MEASUREMENTS

Available lengths

Standard lengths	2000 to 13500 mm
Longer lengths*	On request
Shorter lengths*	Below 2000 mm

*Non-standard lengths are available on request and subjected to a surcharge

Tolerances

Length	L ≤ 3000 mm	-5 mm	+5 mm
	L ≥ 3000 mm	-10 mm	+10 mm
Cover width		-5 mm	+5 mm
Squareness		-5 mm	+5 mm

QUALITY AND GUARANTEE

Quality

The quality of our products is under FPC (Factory Production Control) continuously monitored in our own testlaboratory. These procedures are secured under ISO9001.

Certification

The REX Rooflights can be supplied including the following certificates / quality marks:



Guarantee

All products from REX Panels & Profiles come with a standard 10-year product warranty.

PACKAGING AND TRANSPORT**Packaging**

The REX Rooflights are stacked on pallets to create solid and manageable bundles. The bundles are protected with wood on all sides for transport protection.

Transport

All deliveries are made via standard road transport to the construction site (maximum standard length 13500 mm). The trucks must be unloaded by the customer with suitable lifting equipment. Transport of longer lengths and / or self-unloaders is also possible on request.



LOCATION 1

Z.I. Tournai Ouest
Rue du mont des Carliers 4
7522 Blandain
VAT BE 0473.823.026

LOCATION 2

Z.I. Tournai Ouest
Rue du Grand Carex 7
7503 Froyennes
VAT BE 0473.823.026

CONTACT

T: +32 69 44 66 80
F: +32 69 44 66 81
E: info@rexpanels.com